

Intake/delivery connections 1/2" - flow rate 30 l/min

MICROBOXER



construction materials: PP - PVDF - ALU - Aisi 316



PP


Intake/delivery connections	G 1/2"		
Air connection	G 1/4"		
Max. self-priming capacity*	6 m		
Max. flow rate*	30 l/min		
Max. head*	70 m		
Max. air supply pressure	7 bar		
Max. diameter of passing solids (spherical particles)	2 mm		

Net weight	PP	1.6 Kg	(zone 2) 60°C Max. temp.
	PVDF	1.9 Kg	(zone 2) 95°C Max. temp.
	Alu	2 Kg	(zone 2) 95°C Max. temp.
	Aisi 316	3.8 Kg	(zone 2) 95°C Max. temp.

*The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

TECHNICAL DATA

PERFORMANCE

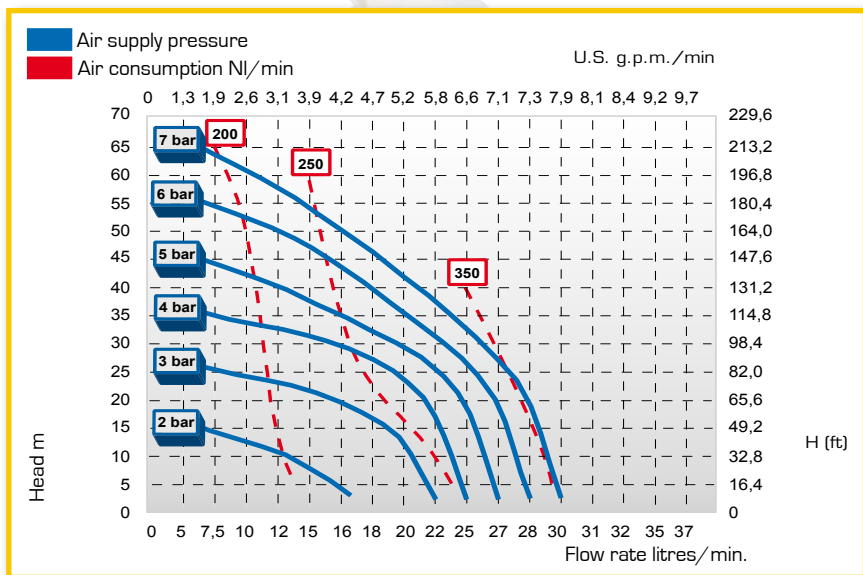

PVDF




ALU



AISI 316

DIMENSIONS

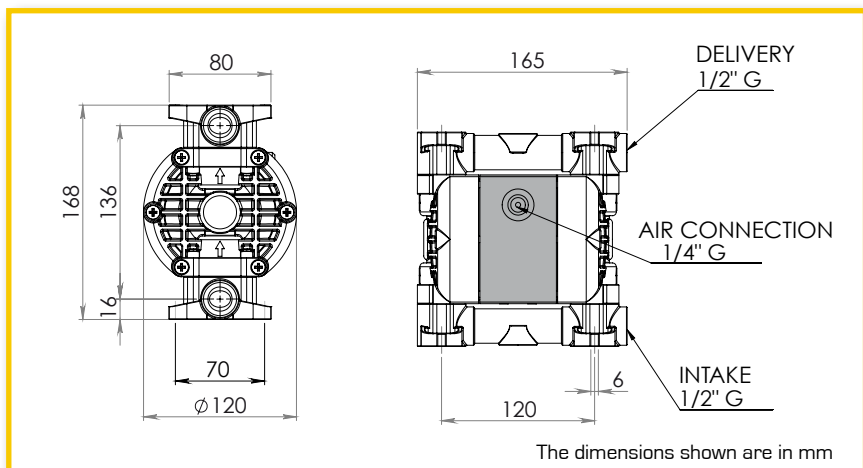

All the values shown are approximate and not binding